



RO

Resin Off

'Universal' mould-tool cleaner

RO removes virtually all thermoplastics including polyacetal, PUs, flame retardant resins and polymers. BiRAL RO's special resin stripping solvent (safe on all metal moulds) removes virtually all thermoplastic materials & resins that occur and adhere to the tool during processing. RO also removes deposits of 'plated-on' mould release and the deposits that occur from 'gassing' in the mould. BiRAL RO is an excellent de-greaser too.

GENERAL AREAS OF APPLICATION:


Ideal for all moulding tool applications eg: injection, blow, thermoforming, extrusion dies & profiles, vacuum, PU foam moulding, dip etc. etc.
Not suitable for thermosets.

OPERATIONAL PERFORMANCE

- BiRAL RO rapidly removes virtually all thermoplastics including Fire retardant Resins, Polyurethane and Polyacetals.
- BiRAL RO removes baked-on/plated-on deposits.
- BiRAL RO removes gaseous deposits.
- BiRAL RO removes grease, oil and grime.

APPLICATION ADVICE

To remove normal dirt/soiling: Spray RO directly onto area to be cleaned and allow to penetrate/soak for 2-3 minutes. The unwanted deposits and accretions of dirt can then be wiped away. Heavy deposits/soiling: Repeated applications may be required aided by rubbing with soft metal (copper) cleaning pad.

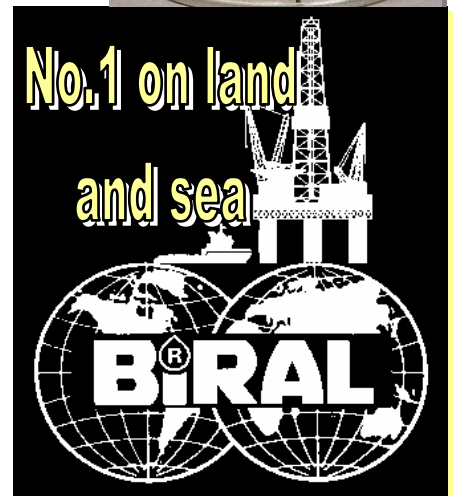

DTS Process Technologies Ltd
Meiklewood Business Park-Glasgow Road-Kimarnock-Scotland-KA3 6AG
Tel: +44 (0)1563 534713 - Fax: +44 (0)1563 532543

www.dtsprocess.com